


## Replacing the Battery Water Sensor RE118

**CAUTION!** Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the manufacturer's instructions.

**WARNING!** This product contains a coin battery. If it is swallowed, it can cause severe internal burns in just 2 hours and can lead to death. Keep new and used batteries away from children. If the battery compartment does not close securely, stop using the product and keep it away from children. If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

### Step by Step Instructions:

1. Insert a flat blade screwdriver into the front slot and twist.
2. Slide both old batteries out and the new batteries in. Requires 2 **CR2032** lithium batteries
3. To reinstall the cover, align the rear latches and roll the cover forward until it snaps into place.

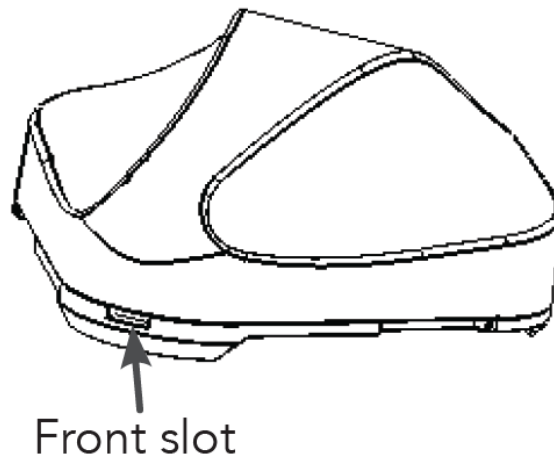

### Pro Tips:

- The cover can be removed without removing the wall clip.
- Both titanium probes must be in the same puddle for the sensor to detect water.
- Tamper detection depends on how the sensor is installed.
- Sensor secured to wall: Tamper is indicated when lifted off the clip.
- Sensor NOT secured to wall: Tamper is indicated when the cover is removed.
- When changing the batteries replace both with new batteries.